

Variety of Available Test Fixtures and Cables

A variety of test fixtures and cables is available for the HP LCR meters for many applications. Figure 1 is a compatibility chart for the test fixtures and cables and HP's LCR meters. Refer to the individual LCR meter data sheet for details.

- *1: Information given with cable length: Connector type, recommended frequency of use, maximum applicable dc voltage.
- *2: Information given with recommended frequency of use: Maximum applicable dc voltage.
- *3: Information given with cable length: Recommended frequency of use, maximum applicable dc voltage, (shape of UNKNOWN terminals).
- *4: A cable with 7-mm connectors required
- *5: HP 16034E, 16047A, 16089A/B/C/D, HP 16334A, and HP 16048A/B/D/E can be connected.



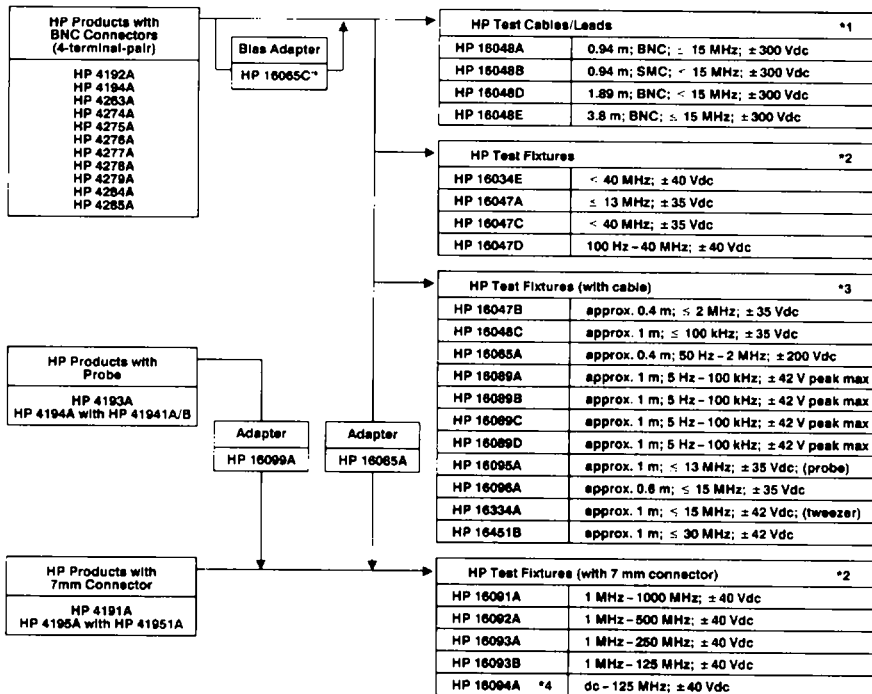


Figure 1. HP instruments versus accessories

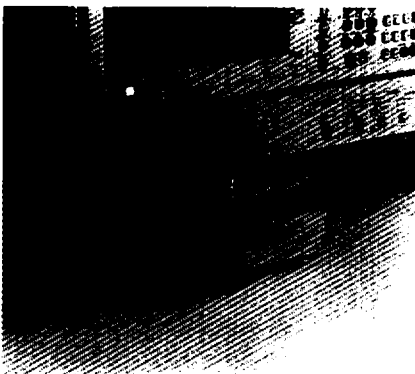


HP 16092A with HP 16085B

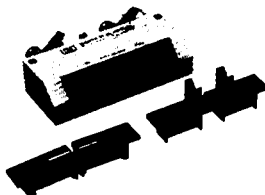

HP 16047D



HP 16048A



HP 16093A with HP 16099A

Note: Refer to the sections of the HP 41941A/B and 41951A for more information.




HP 16047C




HP 16034E



HP 16334A

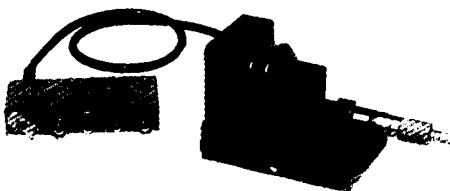

HP 16451B

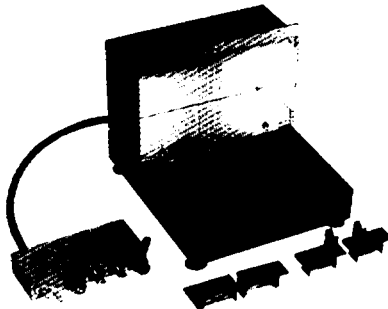

HP 16065A



HP 16089B