


# OSCILLOSCOPES


## Digitizing Oscilloscopes

HP 54501A, 54502A, 54503A, 54504A, 54510A

- Choice of 100 MHz, 250 MHz, 400 MHz, 500 MHz bandwidth
- Single-shot and repetitive signal performance
- Up to 4 channels
- Fully programmable
- Automatic pulse parameter measurements
- Dual-time-base windowing (except HP 54510A)
- Pan and zoom (HP 54510A)
- Automatic limit testing
- Three-year warranty
- Affordable

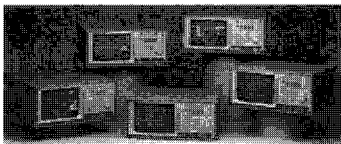

HP 54501A, 54502A, 54503A,  
54504A, 54510A

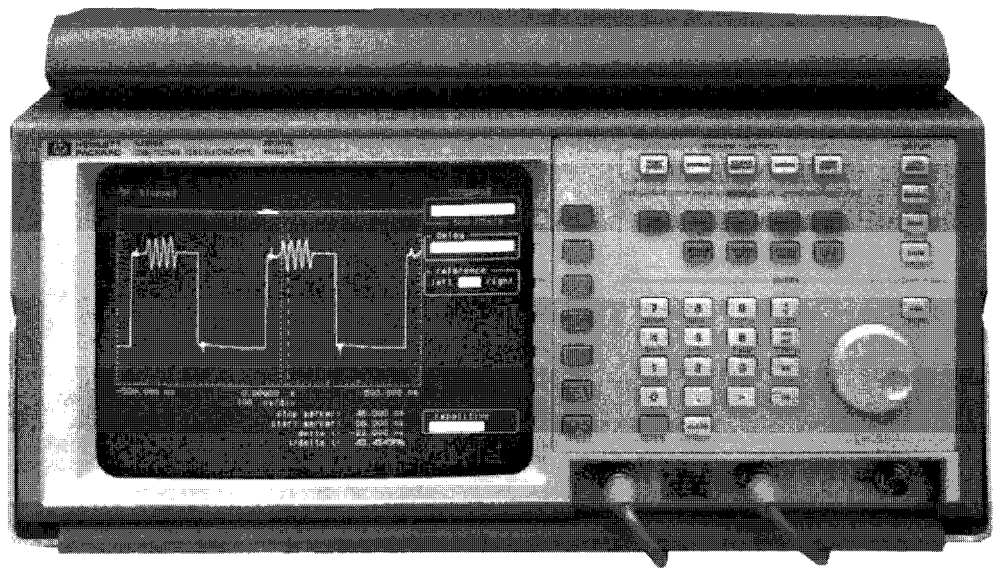

### The HP 54500 Family of Digitizing Oscilloscopes

#### A Family of Affordable Digitizing Oscilloscopes

There are 5 models in the HP 54500 family of digitizing oscilloscopes. For repetitive signals, the HP 54501A and 54503A offer 100 MHz and 500 MHz, respectively, and 4-channel, general-purpose performance. When single-shot capability is important, the HP 54502A and 54504A provide, respectively, 100 MHz and 50 MHz single-shot, and they both provide 400 MHz repetitive signal bandwidths. Using custom ADC design and other custom-integrated circuits, the HP 54510A boosts single-shot performance to 250 MHz as the first 1 gigasample-per-second portable oscilloscope. All these instruments deliver surprising performance at an affordable price.

#### The Digitizing Advantage

The HP 54500 family of oscilloscopes has features and functions that were previously available only on considerably higher-priced instruments. Like the HP 54100 series digitizing oscilloscopes, these instruments include all the digitizing advantages, such as autoscale, pushbutton hard-copy output, automatic measurements, nonvolatile setup and waveform memories, and full HP-IB programmability.

#### Affordable Automation

The HP 54500 family's fully programmable setup and data acquisition capabilities can be used with your HP Vectra PC, IBM PC, or other compatible personal computer. The built-in HP-IB interface, the simplified, self-documenting programming language, and the high data throughput rate provide a modestly priced yet powerful automated test system.

#### Easy to Use

All members of the HP 54500 family have a simplified user interface that makes them easy to operate. Adjustments are made with a single front-panel knob or numeric keypad. Automatic measurements, hard-copy output, and instrument setup are performed with simple keystrokes. Operation is intuitive and straightforward.

#### Advanced Logic and TV Triggering

Hewlett-Packard's advanced logic triggering is a standard feature in the HP 54500 family. Use it to trigger on a wide variety of user-specified conditions. Trigger on edge, pattern, state, or trigger-after-delay to capture such elusive events as timing violations or transient bus phenomena.

Select line and field for a variety of video waveforms. The 54500 family makes it easy to focus on the video information you need to capture.

#### Measurement Limit Test

Using measurement limit test, the HP 54500 family can automatically characterize a circuit or device over temperature or time—without human supervision. Specify upper and lower limits for any 3 of the instrument's automatic measurements, and leave it running unattended. If a measurement exceeds predefined limits, the violating waveform, measurements, and other display data can be automatically stored or transferred to an external printer or controller.

These instruments can automatically calculate maximum, minimum, average, and most recent values for all measurements, making device or circuit characterization even more accurate.

#### Dual-time-base Windowing<sup>1</sup>

Dual-time-base windowing lets you zoom in on fine details of the waveform you are measuring. Similar to the dual-delayed sweep feature found on some analog oscilloscopes, dual-time-base windowing gives you a time-expanded view of a smaller portion of the waveform, defined by you with the instrument's easy-to-use cursors.

#### Lightweight and Portable

Members of the HP 54500 family weigh only 22 pounds and are easily transported. Their small size allows them to fit easily in the trunk of a car, making them ideal for field applications. An optional soft carrying case is also available, as well as a sturdy transit case for safe shipment. See page 163 for accessories.

<sup>1</sup>The HP 54510A has "Pan and Zoom" in place of this feature (see page 149).

#### HP 54510A: 1 GSa/s Digitizing Oscilloscope

The HP 54510A is a 1 gigasample/second, 2-channel, portable digitizing oscilloscope with a memory depth of 8 k samples per channel. The HP 54510A retains all of the key features and user friendliness of other 54500 Series oscilloscopes. The HP 54510A adds waveform calculus, memory bar for pan and zoom, faster update rate, and faster throughput over HP-IB. The HP 54510A is an affordable high-performance oscilloscope for applications such as advanced hardware design and troubleshooting, high-energy research, and manufacturing test/ATE.

#### HP 54510A Specifications and Characteristics

##### Vertical (voltage)

<b>Bandwidth:</b> dc-coupled <sup>1</sup>	dc to 250 MHz (–3 dB) (300-MHz repetitive mode typical)	
<b>Switchable bandwidth limits</b>	ac-coupled lower –3 dB frequency: 90 Hz LF reject lower –3 dB frequency: 450 Hz Bandwidth limit –3 dB frequency: 30 MHz	
<b>Rise time<sup>2</sup></b>	1.4 ns	
<b>Number of channels</b>	2 (simultaneous)	
<b>Vertical sensitivity range</b>	1 mV/div to 5 V/div	
<b>Vertical gain accuracy<sup>3,4</sup></b>	± 1.25% of full scale	
<b>Vertical resolution<sup>4</sup></b>	8 bits over eight divisions (± 0.4%) 10 bits via HP-IB w/averaging (± 0.1%)	
<b>Maximum sample rate</b>	1 GSa/s (2 ch. simultaneous)	
<b>Waveform record length<sup>5</sup></b>	8001 points (real time) 501 points (repetitive)	
<b>Input R (selectable)</b>	1 MΩ ± 1% or 50 Ω ± 1%	
<b>Input C</b>	7 pF nominal	
<b>Input coupling</b>	ac, dc	
<b>Maximum input voltage</b>	1 MΩ ± 250 V [dc + peak ac (< 10 kHz)] 50 Ω: 5 V rms	
<b>Offset range</b>	<b>Vertical Sensitivity</b>	<b>Available Offset</b>
	1 mV to 50 mV/div	± 2 V
	> 50 mV to 250 mV/div	± 10 V
	> 250 mV to 1.25 V/div	± 50 V
	> 1.25 V to 5 V/div	± 250 V
<b>Offset accuracy<sup>4</sup></b>	± (1.0% of ch offset + 2% of full scale)	
<b>Dynamic range</b>	± 1.5 × full scale from center of screen	
<b>Channel-to-channel isolation</b>	40 dB: dc to 50 MHz 30 dB: 50 MHz to 250 MHz	
<b>Voltage measurement accuracy<sup>1,4</sup></b>		
<b>Dual cursor</b>	± (1.25% of full scale + 0.032 × V/div)	
<b>Single cursor</b>	± (1.25% of full scale + offset accuracy + 0.016 × V/div)	

##### Horizontal (time)

<b>Time base range</b>	1 ns/div to 5 s/div	
<b>Maximum time base resolution</b>	20 ps	
<b>Delta-t accuracy<sup>6</sup></b>		
Repetitive	± (0.005% × delta t + 2(10 <sup>4</sup> ) × delay setting + 100 ps)	
Real time	± (0.005% × delta t + 2(10 <sup>4</sup> ) × delay setting + 150 ps)	
(single acquisition)		
<b>Delay range (post-trigger)</b>	10,000 × (s/div)	
<b>Delay range (pre-trigger)</b>	Time/div Setting	Available Delay
	100 ns to 5 s/div	– 160 × (s/div)
	1 ns to 50 ns/div	– 8 μs

##### Triggering

<b>Trigger sensitivity<sup>7</sup></b>		
<b>Internal</b>		
dc to 50 MHz	0.5 div	
50 MHz to 250 MHz	1.0 div	
<b>External</b>		
dc to 250 MHz	100 mv p-p into 50 Ω	
<b>Trigger pulse width (minimum)</b>		
Internal	1.75 ns	
External	2.8 ns	
<b>Trigger level range</b>		
Internal:	± 1.5 × full scale from center screen	
External:	± 2 V	

Specifications valid for temperature range ± 10° C from software calibration temperature with eight or more averages selected.

<sup>1</sup> Upper bandwidth reduces by 2.5 MHz for each degree above 35° C.

<sup>2</sup> Rise times are calculated from  $t_r = \frac{0.35}{\text{bandwidth}}$

<sup>3</sup> Accuracies decrease 0.08% of full scale per degree C from firmware calibration temperature and are valid for a temperature range ± 10° C from firmware calibration temperature. These accuracies apply to both repetitive and real time (single acquisition modes).

<sup>4</sup> Expansion is used below 7 mV/div range, so resolution and accuracies are correspondingly reduced. Below 7 mV/div, full scale is defined as 56 mV.

<sup>5</sup> Available over HP-IB waveform record length is:  
Real time: 8,000 points  
Repetitive: 500 points

<sup>6</sup> Specification applies at the maximum sampling rate. At lower sampling rates specification should read ± (0.005% × delta t + 2(10<sup>4</sup>) × delay setting + 0.15 × sample interval). For bandwidth limited signals  $t_r = 1.4 \times \text{sample interval}$ . Sample interval is defined as 1/sample rate. Specification also applies to those automatic measurements computing time intervals on similar slope edges (such as pos-pos, neg-neg).

##### Ordering Information

The HP 54510A Digitizing Oscilloscope comes with two HP 10430A 10:1 10 MΩ probes, a front-panel manual, a programming manual, a service manual, a miniature probe to BNC male adapter, a power cord, and a 3-year warranty.

	<b>Price</b>
<b>HP 54510A</b> 1 GSa/s Digitizing Oscilloscope	\$10,950
<b>Opt 908</b> Rackmount Kit (5061-6175)	+ \$250
<b>Opt 910</b> Additional front panel, programming and service manuals	+ \$75
<b>Opt 090</b> Delete probes	– \$200

# OSCILLOSCOPES

## Digitizing Oscilloscopes

### HP 54504A

#### HP 54504A 400 MHz, 200 MSa/s Digitizing Oscilloscope with 8-bit Vertical Resolution

The HP 54504A is a 400 MHz, 200 MSa/s sample rate, 2-channel digitizing oscilloscope with 8-bit A/Ds designed for both repetitive and single-shot signals. In repetitive mode, the HP 54504A has 400 MHz bandwidth. In real-time mode, its 200 MSa/s sample rate provides a single-shot bandwidth of 50 MHz. Like other members of the HP 54500 family, the HP 54504A has all the digitizing advantages of oscilloscopes that are much higher in price. Its high repetitive/single-shot bandwidth, ease of use, HP-IB programmability, and HP 54500 family general-purpose features make it a powerful tool for both manual and automated test applications.

#### HP 54504A Specifications and Characteristics

Vertical (voltage)	Real-Time	Repetitive
<b>Bandwidth</b> (-3 dB) dc-coupled	dc to 50 MHz	dc to 400 MHz <sup>1,2</sup>
<b>Switchable bandwidth limits</b>	ac-coupled lower -3 dB freq.: 10 Hz LF reject lower -3 dB freq.: 450 Hz Bandwidth limit: dc to 30 MHz	
<b>Rise time<sup>2</sup></b>	7.0 ns	875 ps
<b>Number of channels</b>	2 (simultaneous)	
<b>Vertical sensitivity range</b>	1 mV/div to 5 V/div	
<b>Vertical gain accuracy (dc)<sup>3,4</sup></b>	± 1.50% of full scale	
<b>Vertical resolution<sup>4</sup></b>	± 0.4% of full scale (8 bit A/D) ± 0.1% of full scale (10 bits with ≥ 8 averages)	
<b>Maximum sample rate</b>	200 MSa/s	25 MSa/s
<b>Waveform record length<sup>6</sup></b>	Normal: 501 points Extended: 2001 points	Time/div 5 ns to 5 s/div: 501 pts 2 ns/div: 401 pts 1 ns/div: 201 pts
<b>Input R</b> (selectable)	1 MΩ ± 1% or 50 Ω ± 1%	
<b>Input C</b>	7 pF nominal	
<b>Input coupling</b>	ac, dc	
<b>Maximum input voltage</b>	1 MΩ: ± 250 V [dc + peak ac (< 10 kHz)] 50 Ω: 5 V rms	
<b>Offset range</b>	Vertical sensitivity: 1 to 50 mV/div > 50 to 250 mV/div > 250 mV to 1.25 V/div > 1.25 to 5V/div	Available offset: ± 2 V ± 10 V ± 50 V ± 250 V
<b>Offset accuracy<sup>4</sup></b>	± (+ 1.0% of ch. offset + 2% of full scale)	
<b>Dynamic range</b>	± 1.5 × full scale from center of screen	
<b>Channel-to-channel isolation</b> (with channels at equal sensitivity)	40 dB: dc to 50 MHz N/A: 50 to 400 MHz	40 dB: dc to 50 MHz 30 dB: 50 to 400 MHz
<b>Voltage measurement accuracy (dc)<sup>3,4</sup></b>	Dual cursor: ± (1.5% of full scale + 0.032 × V/div) Single cursor: ± (1.5% of full scale + offset accuracy + 0.016 × V/div)	

Horizontal (time)	Real-Time	Repetitive
<b>Time base range</b>	1 ns/div to 5 s/div	
<b>Time base reference accuracy</b>	0.01%	
<b>Maximum time base resolution</b>	50 ps	
<b>Delta-t accuracy</b>	± (2% × s/div + 0.01% × delta t + 1 ns)	± (2% × s/div + 0.01% × delta t + 250 ps)
<b>Delay range</b> (post-trigger)	Time/div setting: 50 ms to 5 s/div 100 μs to 20 ms/div 1 ns to 50 μs/div	Available delay: 40 × (s/div) 1s 10,000 × (s/div)
<b>Delay range</b> (pre-trigger)	All time/div settings: 40 × (s/div)	Time/div setting: 1 μs to 5 s/div 10 ns to 500 ns/div 1 ns to 5 ns/div
		Available delay: 40 × (s/div) -80 μs -10,000 × (s/div)

#### Triggering

<b>Internal trigger coupling</b>	Line trigger Low-frequency reject (-3dB 50 KHz)	
<b>Trigger sensitivity<sup>4</sup></b>	Internal: dc to 50 MHz: 0.5 div 50 MHz to 100 MHz: not applicable 100 MHz to 400 MHz: not applicable External: dc to 250 MHz: 100 mV peak-to-peak into 50 Ω	
<b>Trigger pulse width</b> (minimum):	Internal: 14.0 ns External: 2.8 ns	
<b>Trigger level range</b>	Internal: ± 1.5 × full scale from center of screen External: ± 2V	

**Power requirements:** Voltage: 115/230 Vac, -25% to +15% 48 to 66 Hz. Power 350 VA maximum.

**Weight:** Net: approximately 10 kg (22 lb). Shipping: approximately 20 kg (44 lb).

**Size:** 194.3 mm H × 422.3 mm W × 355.6 mm D (7.65 in × 16.62 in × 14 in) Does not include front panel protrusions

Specifications valid for temperature range ± 10°C from software calibration temperature with 8 or more averages selected.

<sup>1</sup>Upper bandwidth reduces by 2.5 MHz for each °C above +35°C.

<sup>2</sup>Rise times are calculated from:

$$t_r = \frac{0.35}{\text{bandwidth}}$$

<sup>3</sup>Vertical gain accuracy decreases 0.08% per °C from software calibration temperature.

<sup>4</sup>Expansion is used below 7 mV/div range so vertical resolution and accuracies are correspondingly reduced. Below 7mV/div full scale is defined as 56 mV.

<sup>5</sup>On time/div settings 1 μs/div and slower, bandwidth in repetitive mode is 50 MHz.

<sup>6</sup>Available over HP-IB waveform record length is:

Real-time normal: 500 points; extended: 2000 points.

Repetitive 10 ns to 5 s/div: 1024 pts.

5 ns/div: 1000 pts.

2 ns/div: 400 pts.

1 ns/div: 200 pts.

#### Ordering Information

The HP 54504A digitizing oscilloscope comes complete with two HP 10430A 10:1 10 MΩ probes, a front panel manual, a programming manual, a service manual, a power cord, and a three-year warranty.

HP 54504A Digitizing Oscilloscope	qty 1	Price
	qty ≥ 2 (each)	\$6,750
<b>Opt 908 Rack Mount Kit (5061-6175)</b>		\$6,549
<b>Opt 910 Additional Front-Panel, Programming, and Service Manual (54504-90901, 54504-90902)</b>		+ \$250
<b>Opt 090 Delete Probes</b>		+ \$75
		- \$200

☎ For off-the-shelf shipment, call 800-452-4844.

## HP 54503A 500 MHz 4-Channel Digitizing

### Oscilloscope

The HP 54503A is a 500 MHz, 4-channel digitizing oscilloscope designed primarily for repetitive signal applications. All 4 channels have full-featured attenuators. Like all of the HP 54500 family oscilloscopes, the 54503A features 2-channel simultaneous sampling and has the digitizing advantages of oscilloscopes much higher in price. Its 4 channels, 500 MHz repetitive signal bandwidth, ease of use, HP-IB programmability, and HP 54500 family general-purpose features make it a powerful tool for both manual and automated test applications.

### HP 54503A Specifications and Characteristics

#### Vertical (voltage)

<b>Bandwidth: (-3 dB) dc-coupled</b>		
Repetitive: <sup>1</sup>	dc to 500 MHz	
Single-shot:	dc to 2 MHz (based on 10 points per period of input signal)	
<b>Switchable bandwidth limits</b>	ac-coupled lower -3 dB frequency: 10 Hz LF reject lower -3 dB frequency: 450 Hz Bandwidth limit upper -3 dB frequency: 30 MHz	
<b>Rise time</b>	700 ps (calculated from: rise time = 0.35/BW)	
<b>Number of channels<sup>2</sup></b>	4	
<b>Vertical sensitivity range (all channels)</b>	1 mV/div to 5 V/div	
<b>Vertical gain accuracy dc<sup>3,4</sup></b>	± 1.25%	
<b>Vertical resolution<sup>4</sup></b>	± 0.4% (8 bit A/D) ± 0.1% (10 bits via HP-IB with averaging)	
<b>Maximum sample rate</b>	20 MSa/s	
<b>Waveform record length<sup>5</sup></b>	501 points (display) 1024 points (via HP-IB)	
<b>Input R (selectable)</b>	1 MΩ ± 1% or 50 Ω ± 1%	
<b>Input C</b>	7 pF nominal	
<b>Input coupling</b>	ac, dc	
<b>Maximum input voltage</b>	1MΩ: ± 250V [dc + peak ac < 10 kHz] 50 Ω: 5V rms	
<b>Offset range</b>	Vertical sensitivity:	Available offset:
	1mV to 50 mV/div	± 2V
	> 50 mV to 250 mV/div	± 10V
	> 250 mV to 1.25 V/div	± 50V
	> 1.25 V to 5 V/div	± 250V
<b>Offset accuracy<sup>4</sup></b>	± (2% of full scale + 0.5% of offset)	
<b>Dynamic range</b>	(dc + peak ac) ± 1.5 × full scale from center of screen	
<b>Channel-to-channel isolation</b>	40 dB: dc to 100 MHz 30 dB: 100 to 500 MHz (with channels at equal sensitivity)	
<b>Voltage measurement accuracy</b>		
Dual cursor: <sup>3,4</sup>	± (1.25% of full scale + 0.032 div)	
Single cursor:	± (1.25% of full scale + offset accuracy + 0.016 div)	

#### Horizontal (time)

<b>Time base range</b>	200 ps/div to 5 s/div	
<b>Time base reference accuracy</b>	0.005%	
<b>Maximum time base resolution</b>	20 ps	
<b>Delta-t accuracy</b>	± 2% of s/div ± 0.005% × delta t ± 100 ps	
<b>Delay range (post-trigger)</b>	Time/div setting:	Available delay:
	50 ms to 5 s/div	40 × (s/div)
	100μ to 20 ms/div	1 s
	200 ps to 50 μs/div	10,000 × (s/div)
<b>Delay range (pre-trigger)</b>		
	5 μs to 5s	-39.96 × (s/div)
	10 ns to 2μs	-99.9 μs
	200 ps to 5 ns	-10,000 × (s/div)

Triggering	Real-time	Repetitive
<b>Trigger sensitivity</b>		
≥ 5 mV/div:	dc to 100 MHz 100 to 500 MHz	0.063 of full-scale 0.156 of full scale
< 5mV/div:	dc to 100 MHz 100 to 500 MHz	2.5 mV 6 mV
<b>Trigger pulse width (minimum)</b>	1.5 ns	
<b>Trigger level range</b>	± 1.5 × full scale from center of screen	

**Power Requirements:** Voltage: 115/230 Vac, -25% to +15% 48 to 66 Hz. Power 350 VA maximum.

**Weight:** Net: approximately 10 kg (22 lb). Shipping: approximately 20 kg (44 lb).

**Size:** 194.3 mm H × 422.3 mm W × 355.6 mm D (7.65 in × 16.62 in × 14 in); does not include front panel protrusions

Specifications valid for temperature range ± 10° C from software calibration temperature with 8 averages selected and channel(s) in sensitivity range 1, 2, or 5.

<sup>1</sup>Upper bandwidth reduces by 2.5 MHz for each degree centigrade above +35° C.

<sup>2</sup>Simultaneous acquisition on two channels. Channels 1 and 4 are acquired simultaneously. If four channels are used, data is acquired alternately by channels 1 and 4, then 2 and 3.

<sup>3</sup>Accuracy reduces by ± 0.08% for each degree centigrade away from software calibration temperature.

<sup>4</sup>Expansion is used below 7 mV/div range so vertical resolution and accuracies are correspondingly reduced.

<sup>5</sup>For single-shot via HP-IB, waveform record length is 500 points. In repetitive mode: 200 ps/div time base range, waveform record length is 100 points. 500 ps/div time base range, waveform record length is 250 points. 1 ns/div time base range, waveform record length is 500 points. ≥ 2 ns/div time base range, waveform record length is 1000 points.

### HP 54503A Telecommunications Mask Template Test Option

Make telecom mask template measurements to ANSI, CCITT, and ISDN standards without using Mylar overlays. HP 54503A Option 001 automates many of the mask measurements that are time-consuming with analog oscilloscopes. Pass-fail accuracy and repeatability are improved through the use of automatic measurements, eliminating human error.

#### HP 54503A Option 001 Features

- 16 standard telecom signal mask templates stored in ROM
- Positive and negative templates
- Automatic triggering on positive "isolated ones"<sup>†</sup> in live traffic for many standard telecom signals
- Automatic best-fit of test signals to positive mask templates
- Automatic pass-fail comparison of mask templates with corresponding input signals
- Automatic storage, printing, or plotting of failed signals
- User-defined pass-fail tolerance
- Memory protection for user mask templates, waveforms, and front panel setups

For more information on this option and a technical data sheet, contact your local HP sales office (see page 684).

<sup>†</sup>For the HP 54503A Option 001, the term "isolated ones" is defined as a pulse sequence of at least two zeroes followed by a one, followed by at least two zeroes.

#### Ordering Information

The HP 54503A digitizing oscilloscope comes complete with two HP 10430A 10:1 10 MΩ probes, a front-panel manual, a programming manual, a service manual, a power cord, and a three-year warranty.

HP 54503A Digitizing Oscilloscope	qty 1	Price
	qty ≥ 2 (each)	\$5,950
<b>Opt 001 Telecommunications Mask Template Test Option</b>		\$5,773
<b>Opt 908 Rack Mount Kit (5061-6175)</b>		+ \$500
<b>Opt 910 Additional Front-Panel, Programming and Service Manual (54503-90901, 54503-90902)</b>		+ \$250
<b>Opt 090 Delete Probes</b>		+ \$75
		- \$200

☎ For off-the-shelf shipment, call 800-452-4844.

# OSCILLOSCOPES

## Digitizing Oscilloscopes

### HP 54502A

#### HP 54502A 400 MHz, 400 MSa/s Digitizing Oscilloscope

The HP 54502A is a 400 MHz, 400 MSa/s sample rate, 2-channel digitizing oscilloscope designed for both repetitive and single-shot signals. In repetitive mode, the HP 54502A has a 400 MHz bandwidth. In real-time mode, its 400 MSa/s sample rate provides a single-shot bandwidth of 100 MHz. Like other members of the HP 54500 family, the HP 54502A has all the digitizing advantages of oscilloscopes that are much higher in price. Its high repetitive/single-shot bandwidth, ease of use, HP-IB programmability, and HP 54500 family general-purpose features make it a powerful tool for both manual and automated test applications.

#### HP 54502A Specifications and Characteristics

	Real-Time	Repetitive
<b>Bandwidth</b> (-3 dB) dc-coupled	dc to 100 MHz	dc to 400 MHz <sup>1,2</sup>
<b>Switchable bandwidth limits</b>	ac-coupled lower -3 dB freq.: 10 Hz LF reject lower -3 dB freq.: 450 Hz Bandwidth limit: dc to 30 MHz	
<b>Rise time<sup>2</sup></b>	3.5 ns	875 ps
<b>Number of channels</b>	2 (simultaneous)	
<b>Vertical sensitivity range</b>	2 mV/div to 5 V/div	
<b>Vertical gain accuracy (dc)<sup>3,4</sup></b>	±2.0% of full scale	
<b>Vertical resolution<sup>4</sup></b>	±1.6% of full scale (6 bit A/D) ±0.4% of full scale (8 bits with ≥ 8 averages)	
<b>Maximum sample rate</b>	400 MSa/s	25 MSa/s
<b>Waveform record length<sup>5</sup></b>	Normal: 501 points Extended: 2001 points	Time/div 5 ns to 5 s/div 2 ns/div 1 ns/div Rec length 501 pts 401 pts 201 pts
<b>Input R</b> (selectable)	1 MΩ ±1% or 50 Ω ±1%	
<b>Input C</b>	7 pF nominal	
<b>Input coupling</b>	ac, dc	
<b>Maximum input voltage</b>	1 MΩ: ±250 V [dc + peak ac (<10 kHz)] 50 Ω: 5 V rms	
<b>Offset range</b>	Vertical sensitivity: 2 mV to 50 mV/div >50 mV to 250 mV/div >250 mV to 1.25 V/div >1.25 V to 5V/div	Available offset: ±2 V ±10 V ±50 V ±250 V
<b>Offset accuracy<sup>4</sup></b>	±(2 mV + 2% of ch. offset + 2.5% of full scale)	
<b>Dynamic range</b>	±1.5 × full scale from center of screen	
<b>Channel-to-channel isolation</b>	40 dB: dc to 50 MHz 30 dB: 50 to 100 MHz (with channels at equal sensitivity)	40 dB: dc to 50 MHz 30 dB: 50 to 400 MHz
<b>Voltage measurement accuracy (dc)<sup>3,4</sup></b>		
<b>Dual cursor:</b>	±(2.0% of full scale + 0.032 × V/div)	
<b>Single cursor:</b>	±(2.0% of full scale + offset accuracy + 0.016 × V/div)	
<b>Time base range</b>	1 ns/div to 5 s/div	
<b>Time base reference accuracy</b>	0.01%	
<b>Maximum time base resolution</b>	50 ps (maximum)	
<b>Delta-t accuracy</b>	±(2% × screen diameter + 0.01% × delta t + 500 ps)	±(2% × screen diameter + 0.01% × delta t + 250 ps)
<b>Delay range</b> (post-trigger)	Time/div setting: 50 ms to 5 s/div 100 μs to 20 ns/div 1 ns to 50 μs/div	Available delay: 40 × (s/div) 1 s 10 000 × (s/div)

	Real-Time	Repetitive	
<b>Delay range</b> (pre-trigger)	All time/div settings: 40 × (s/div)	Time/div setting: 1 μs to 5 s/div 10 ns to 500 ns/div 1 ns to 5 ns/div	Available delay: -40 × (s/div) -80 μs -10 000 × (s/div)
<b>Internal trigger coupling</b>	Line trigger Low-frequency reject (-3dB 50 KHz)		
<b>Trigger sensitivity<sup>4</sup></b>			
Internal			
dc to 100 MHz	0.5 div	0.5 div	
100 MHz to 400 MHz	N/A	1.25 div	
External			
dc to 250 MHz	100 mV peak-to-peak into 50 Ω		
<b>Trigger pulse width</b> (minimum):			
Internal:	7.0 ns		
External:	2.8 ns		
<b>Trigger level range</b>	Internal: ±1.5 × full scale from center of screen External: ±2V		

**Power requirements:** Voltage: 115/230 Vac, -25% to +15% 48 to 66 Hz. Power 350 VA maximum.

**Weight:** Net: approximately 10 kg (22 lb). Shipping: approximately 20 kg (44 lb).

**Size:** 194.3 mm H × 422.3 mm W × 355.6 mm D (7.65 in × 16.62 in × 14 in); does not include front panel protrusions.

Specifications valid for temperature range ±10° C from software calibration temperature with 8 or more averages selected.

<sup>1</sup>Upper bandwidth reduces by 2.5 MHz for each °C above +35° C.

<sup>2</sup>Rise times are calculated from:

$$t_r = \frac{0.35}{\text{bandwidth}}$$

<sup>3</sup>Vertical gain accuracy decreases 0.08% per °C from software calibration temperature.

<sup>4</sup>Expansion is used below 7 mV/div range so vertical resolution and accuracies are correspondingly reduced. Below 7mV/div full scale is defined as 56 mV.

<sup>5</sup>On time/div settings 1 μs/div and slower, bandwidth in repetitive mode is 100 MHz.

<sup>6</sup>Available over HP-IB waveform record length is:

Real-time normal: 500 points, extended: 2000 points.  
Repetitive 10 ns to 5 s/div: 1024 pts. 2 ns/div: 400 pts.  
5 ns/div: 1000 pts. 1 ns/div: 200 pts.

#### HP 54502A Telecommunications Mask Template Test Option

Make telecom mask template measurements to ANSI, CCITT, and ISDN standards without using Mylar overlays. HP 54502A Option 001 automates many of the mask measurements that are time-consuming with analog oscilloscopes. Pass-fail accuracy and repeatability are improved through the use of automatic measurements, eliminating human error.

#### HP 54502A Option 001 Features

- 16 standard telecom signal mask templates stored in ROM
- Positive and negative templates
- Automatic triggering on positive "isolated ones" in live traffic for many standard telecom signals
- Automatic best-fit of test signals to positive mask templates
- Automatic pass-fail comparison of mask templates with corresponding input signals
- Automatic storage, printing or plotting of failed signals
- User-defined pass-fail tolerance
- Memory protection for user mask templates, waveforms and front panel setups

For more information on this option and a technical data sheet, contact your local HP sales office (see page 684).

<sup>1</sup>For the HP 54502A Option 001, the term "isolated ones" is defined as a pulse sequence of at least two zeroes, followed by a one, followed by at least two zeroes.

#### Ordering Information

The HP 54502A digitizing oscilloscope comes complete with two HP 10430A 10:1 1 MΩ probes, a front panel manual, a programming manual, a service manual, a power cord, and a three-year warranty.

HP 54502A Digitizing Oscilloscope	qty 1	Price
	qty ≥ 2 (each)	\$7,450
<b>Opt 001</b> Telecommunications Mask Template Test Option		\$7,228
<b>Opt 908</b> Rack Mount Kit (5061-6175)		+ \$500
<b>Opt 910</b> Additional Front-Panel, Programming, and Service Manual		+ \$75
<b>Opt 090</b> Delete Probes		- \$200

For off-the-shelf shipment, call 800-452-4844.

### HP 54501A 100 MHz, 4-Channel Digitizing Oscilloscope

The HP 54501A is a 100 MHz, 4-channel digitizing oscilloscope designed primarily for repetitive signal applications. It has all the digitizing advantages of oscilloscopes much higher in price. Ease of use and general-purpose features such as TV trigger, dual-time-base windowing, advanced logic triggering, automatic measurements and full HP-IB programmability make it a powerful tool for both manual and automated test applications.

### HP 54501A Specifications and Characteristics

#### Vertical (voltage)

<b>Bandwidth</b>	
dc-coupled	dc to 100 MHz (-3dB) dc to 1 MHz (Based on 10 points per period of input signal.)
Repetitive:	
Single-shot:	
ac-coupled	10 Hz to 100MHz (-3dB) 10 Hz to 1 MHz (Based on 10 points per period of input signal.)
Repetitive:	
Single-shot:	
<b>Rise time</b>	
	3.5 ns
Calculated from: Rise time = $\frac{0.35}{\text{bandwidth}}$	
<b>Number of channels</b>	
	4 (2+2) Channels 2 and 3 are limited attenuator inputs, optimized for digital signals.
<b>Simultaneous channels</b>	
	2+2 Channels 1 and 4 are acquired simultaneously. If four channels are used, data is acquired alternately by channels 1 and 4, then 2 and 3.
<b>Vertical sensitivity range</b>	
	5 V/div to 5 mV/div
<b>Vertical gain accuracy (dc)</b>	
	± 1.5%
<b>Vertical resolution</b>	
	± 0.4% - 8 bit A/D (Since expansion is used for 5 mV/div range, A/D resolution is 7 bits 0.8% in that range.) ± 0.1% - 10 bits via HP-IB (with averaging)
<b>Maximum sample rate</b>	
	10 Megasamples/second
<b>Memory depth</b>	
	501 points (display) 1024 points (via HP-IB)
For single-shot via HP-IB, maximum memory depth is 501 points. For 2ns/div time base range, memory depth is 200 points. For 5ns/div time base range, maximum memory depth via HP-IB is 501 points.	
<b>Input RC (nominal)</b>	
	1 MΩ, 16 pF
<b>Input coupling</b>	
	ac, dc
<b>Max input voltage</b>	
	± 250 V [dc + peak ac (<10 kHz)]
<b>Offset range</b>	
	Sensitivity range: Available offset: 5 to 50 mV/div ± 2V 0.1 to 1 V/div ± 20V 1 to 5 V/div ± 200V
<b>Offset accuracy</b>	
	± 2% of offset ± 0.2 X (V/div) ± 0.075 division/Δ° C from calibration temperature
<b>Dynamic range</b>	
	± 16 divisions from center operating range for dc + peak ac input.
<b>Channel-to-channel isolation</b>	
	40 dB dc to 20 MHz 30 dB 20 MHz to 100 MHz (with channels at equal sensitivity)
<b>Voltage measurement accuracy</b>	
Single cursor:	gain accuracy + offset accuracy + A/D resolution
Dual cursor:	gain accuracy + (2 × A/D resolution) (single channel)

#### Horizontal (time)

<b>Time base range</b>	2 ns/div to 5 s/div	
<b>Time base accuracy</b>	0.005%	
<b>Maximum time base resolution</b>	100 ps	
<b>Delta-t accuracy</b>	1 ns ± (5E-5) × delta t ± 0.02 × (t/div) Delta-t accuracy for dual-cursor, single-channel measurement, or for channel-to-channel measurement after visual time null calibration has been performed.	
<b>Delay range (post-trigger)</b>	Time base setting	Available delay
	50 ms to 5 s	40 × (s/div)
	100 μs to 20 ms	1 s
<b>Delay range (pre-trigger)</b>	2 ns to 50 μs	10,000 × (s/div)
	10 μs to 5 s	-40 × (s/div)
	20 ns to 5 μs	-200 μs
	2 ns to 10 ns	-10,000 × (s/div)

#### Triggering

<b>Trigger sensitivity</b>	
5mV/div:	dc to 20MHz, 0.1 × full-scale 20MHz to 100MHz, 0.25 × full-scale
All Other:	dc to 20MHz, 0.05 × full-scale 20MHz to 100MHz, 0.125 × full-scale
<b>Trigger pulse width (minimum)</b>	
	7 ns
<b>Trigger level range</b>	
	± 6 div from center

Specifications valid for temperature range ±10° C from calibration temperature with 8 averages selected and channel(s) in sensitivity range 1, 2, or 5.

**Power requirements:** Voltage: 115/230 V ac, -25% to +15% 48 to 66 Hz. Power 350 VA maximum.

**Weight:** Net: approximately 10 kg (22 lb). Shipping: approximately 20 kg (44 lb).

**Size:** 194.3 mm H × 422.3 mm W × 355.6 mm D (7.65 in × 16.62 in × 14 in). Does not include front panel protrusions.

#### Ordering Information

The HP 54501A digitizing oscilloscope comes complete with two HP 10432A 10:1 10 MΩ probes, an operating and programming manual, a service manual, a power cord, and a three-year warranty.

<b>HP 54501A</b> Digitizing Oscilloscope	qty 1	<b>Price</b>
	qty ≥ 2 (each)	\$3,990
<b>Opt 908</b> Rack Mount Kit (5061-6175)		\$3,872
<b>Opt 910</b> One Additional Operating/Programming Manual (54501-90901) and One Additional Service Manual (54501-90902)		+ \$250
<b>Opt 090</b> Delete Probes		+ \$75
		- \$200

☎ For off-the-shelf shipment, call 800-452-4844.